



String Wound Filter Cartridge – USW Series

For General Application



String Wound Filter Cartridge

USW series string wound filter cartridge is a premium-performance filtration product. It is the result of combining computer-aided design and production process to create exact diamond-shaped depth filtration cones.

Unique structured loose outer layers and tight inner layers offers depth filtration that gives you high dirt holding capacity

Features

Choice of Polypropylene, Bleached Cotton and Glass Fiber media

High dirt holding

Effective depth filtration

Specification

Length – 9.75”, 10”, 20”, 30” 40”


Material used :
PP, Cleached Cotton, Glass Fiber
With PP & SS304 core

Micron rating available :
1 to 100 micron

OD option
63 mm and 115 mm



Performance Chart

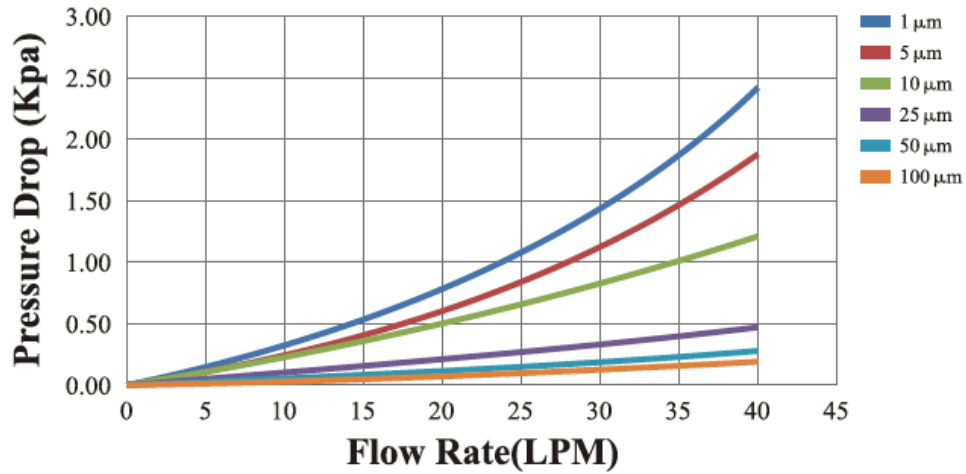

Applications

- Pre Filter for Water Filtration
- Food and Beverage
- Semiconductor
- Chemical Industry

How to order

Filter Cartridge Code USW-PP- BB - 1 - 40 - PN

String Wound Cartridge
PP – PP Yarn / PP Core
PS- PP Yarn / SS304 Core
CS – Bleached Cotton / SS304 Core
GS – Glass Fiber Yarn / SS304 Core

Blank – 63 mm dia
BB – Big Blue 115 mm dia

Rating
1, 5, 10, 20, 30
50, 75, 100 micron

Length
975 – 9.75”
10- 10”
20 – 20”
30 – 30”
40 - 40”

Option
PN – PTFE Netting (for Glass
Fiber only

Asia Pacific Regional Office
Universal Filtration Solutions Asia Pte Ltd
81 Ubi Ave 4, UB-ONE #06-28, Singapore 408830