



Mechanical Cleaning Filter UMCF Series

SBR201912341

MECHANICAL CLEANING FILTER

MECHANICAL CLEANING FILTER UNIT

Contents

Mechanical Cleaning Filter	Page 1
Technical Detail	Page 2
How to order	Page 3

SBR201912341

MECHANICAL CLEANING FILTER
MECHANICAL CLEANING FILTER UNIT

Mechanical Cleaning Filter UMCF Series



SELF CLEANING FOR HIGH VISCOSITY, HIGH DIRT LOAD APPLICATION

Our mechanical clean filter system designed to handle to filter 25 micron and larger in various industries where high particle content, viscous and sticky liquid which other system will simply can't handle.

UMCF filter is ideal for continuous (and therefore batch) applications.

The filtration principle is by using a dual pneumatically driven activators to move the special grade Teflon made disc up and down to perform the cleaning operation inside of the vertically slotted wedge or perforated screen, Our system can either operating in manual or automatic mode. The concentrated dirt are periodically purged for less than 1-2 seconds, so there is no much product loss in the operation.

Features

This special grade of Teflon disc has a doctoring and wiping edge, both edges are pressed tightly against the screen by mechanical loading.



Specification

- Material: SS304, SS316
- Connection Type: ANSI, JIS and DIN
- Pressure rating: 10 Bar
- Size: UMCF-4, 8 and 16 three models
- Pressure Rating: 150#

UMCF Filter Sizing Guide

Liquid Type	Viscosity (cps)	UMCF-4	UMCF-8	UMCF-16
		Max Flow Rate (m3/hr)		
Water	1	3	12	45
Adhesive	10,000-50,000	1	4	12
Edible Oils	10-100	3	12	45
Honey	50-100	3	12	45
Ink (oil based)	100-1,000	3	12	45
Ink (water based)	10-100	3	12	45
Paint	500-1,000	3	12	45
Resin	5,000-50,000	1	4	12

Based on retention of 50 micron or greater
 Recommended max flows based on max of 500 ppm of solids to be removed

	UMCF-4	UMCF-8	UMCF-16
Pipe Size	1.5"	2"	3"

UMCF filter as advantages over other filter systems

- No further media costs likes filter cartridges & bags
- No downtime in your operation
- Save Manpower to manage the filter change out
- Close system, dirt can easily collected
- Compact System and space saving

Applications

- Pulp & Paper Mills
- Food Processing
- Well Water
- Steel Mills
- Chemical Processing
- Parts Washing

Order Specification Code¹

UMCF Code

UMCF- 8 – A -020 A- M

Model


- UMCF-4
- UMCF-8
- UMCF-16

Material

- A – SS304
- S – SS316

Flange Size

M -Basket Opening Size

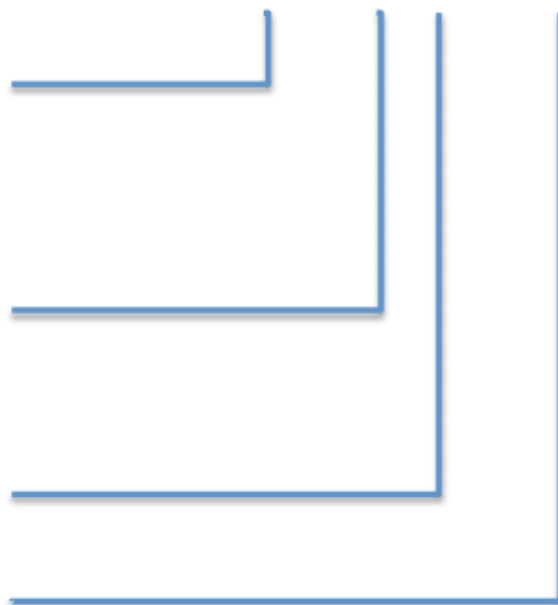

How To Order From Us

Send us an inquiry, we will respond with a quote

Whether its for filter housing, filter bags, cartridges, or customisable solutions, we'll respond with a quotation for your needs. We ensure the highest quality finishes and consistency in our products. Email us your requirements and we'll get in touch.

Purchase order & agreement, and production

Once a purchase order is made and our payments terms are agreed to, we'll begin production of your order. Depending on the order, our lead time would vary between one week to four weeks. We'll keep you updated on the progress and status.

Completion, delivery, and sea freight

Once completed, we'll arrange a sea freight shipment to your specified location. We deliver internationally. Delivery by courier is also available. Clients can choose to arrange for self collection direct from our factories through a forwarder, if they would like to handle their own shipment.

For Inquiry contact us at Sales-Inquiry@universal-filtration.com



For Inquiry contact us at Sales-Inquiry@universal-filtration.com

Asia Pacific Regional Office
Universal Filtration Solutions Asia Pte Ltd
81 Ubi Ave 4, UB-ONE #06-28
Singapore 408830

SBR201912341

MECHANICAL CLEANING FILTER

MECHANICAL CLEANING FILTER UNIT