

Nylon Coreless Filter Cartridge

High Performance Filtration



NYLON Coreless Filter Cartridge

Universal Nylon Coreless Filter Cartridge – our high performance 100% Nylon 6 media with multi-layer structure to give you graded pore and true depth filtration,

Large Diameter Nylon coreless cartridge also gives you a very large filtration area, extends the service life and give you low differential pressure, suitable for high flow filtration, reducing the equipment size and frequency of replacement.

Features

Large OD give you low Differential pressure

High dirt holding/High flow rate

Pure Nylon 6 media

Specification

Length – 20” & 40”

Micron rating available :
1, 5, 10, 20, 40, 70, 100 micron

OD 148 mm, ID 114 mm


Connection
Double open end

Max Operating Temperature – 120 Deg C
Max Differential Pressure – 2.8 bar

Effective Filtration Area – 0.48 m²/ 40 “ length



Performance Chart

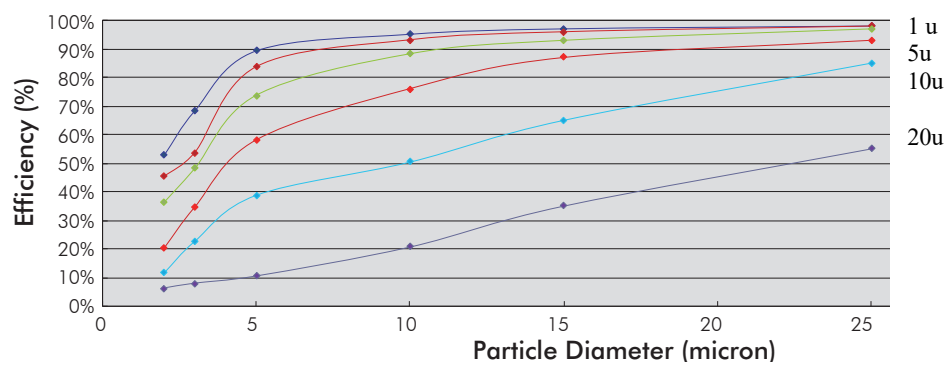

How to order

Filter Cartridge Code **UMBNC - 1 - 40**

UMBNC- Nylon Melt Blown
Coreless
OD 148 mm, ID 114 mm

Micron Rating
1, 5, 10, 20, 40, 70, 100 micron

Length
20". & 40"

Asia Pacific Regional Office
Universal Filtration Solutions Asia Pte Ltd
81 Ubi Ave 4, UB-ONE #06-28, Singapore 408830